

49


系列  
Series

气源处理元件  
Air Filter Combination


# 496(AL1000~5000)系列油雾器 series Lubricator



## 图形符号 Graphical symbols



## 型号注释 Order Code

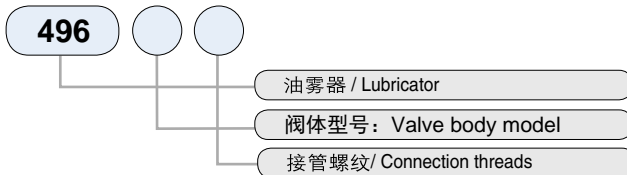

## 技术参数 Specification

保证耐压力 / Pressure Resistance	1.5MPa(15kgf/cm <sup>2</sup> )
最高使用压力 / Max Working Pressure	1.0MPa(10kgf/cm <sup>2</sup> )
环境及流体温度 / Ambient And Fluid Temperature	5~60℃
建议用油 / Recommended Oil Use	透平1号油 / Turbine NO.1Oil ISOVG32
容器材料 / Bowl Material	聚碳酸酯 / Polycarbonate
防护罩 / Protective Cover	AL1000~2000(无) / (Not Available)AL3000~5000(有) / (Available)

型号 Model	规格 / Specifications					配件 / Accessories
	*油滴最小流量 Minimal Flow OF Oil Drop(L/min)	*额定流量 /Rated Flow (L/min)	**接管口径 /Port Size (G)	杯容量 (cm <sup>3</sup> ) /Bowl Capacity	重量 /Weight (Kg)	托架 /Bracket
(496) AL1000-M5	4	95	M5	7	0.07	-
(496) AL2000-01	15	800	1/8	25	0.22	B240
(496) AL2000-02			1/4			
(496) AL3000-02	30	1700	1/4	50	0.30	B340
(496) AL3000-03	40		3/8			
(496) AL4000-03	40	5000	3/8	130	0.56	B440
(496) AL4000-04	50		1/2			
(496) AL4000-06	50	6300	3/4	130	0.58	B540
(496) AL5000-06	190	7000	3/4	130	1.08	B640
(496) AL5000-10			1			

\*供应压力为0.5MPa(5.1kgf/cm<sup>2</sup>).油滴流量为5滴/分钟。透平1号油(ISOVG32)温度20℃情况下。

\*On condition that supply pressure is 0.5Mpa(5.1kgf/cm<sup>2</sup>),oil drop flow is 5 drops/minute,use of Turbine NO.1 Oil and 20℃ tempaurea.

\*供应压力为0.5MPa(5.1kgf/cm<sup>2</sup>).压降为0.03MPa(0.3kgf/cm<sup>2</sup>)情况下。

\*On condition that the supply pressure is 0.5MPa(5.1kgf/cm<sup>2</sup>) and step down is 0.3MPa(0.3kgf/cm<sup>2</sup>)

\*\*接管口径另有RC、NPT, 螺纹可供选择/Rc.and NPT thread are available.